


- NOTES:**
- MATERIALS:**  
 HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED  
 FRONTSEALING: SILICONE VMQ BLUE  
 CABLE SEALING: NBR BLACK  
 JACK-SCREW: STAINLESS STEEL  
 O-RING: NBR BLACK  
 CABLE STRAIN RELIEF: STEEL, NI-PLATED  
 SCREWS: STEEL, NI-PLATED  
 SHIELDING BRACKET: CU-ALLOY, NI-PLATED
  - TEMPERATURE RANGE: -30°C TO +80°C
  - RECOMMENDED TORQUE FOR SCREW:  
 35Ncm (3.1 in.LB)  
 MAX. TORQUE: 68Ncm (6 in.LB)
  - SINGLE PACKED

\* COMPLETELY TIGHTENED

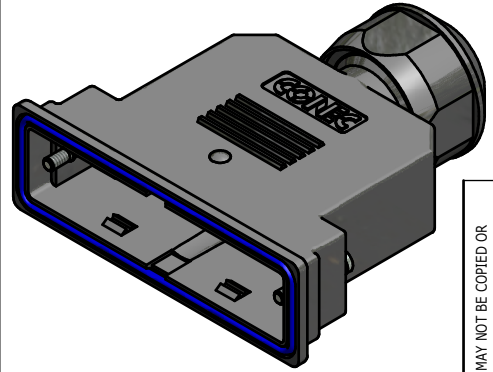

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 1,5:1 (1:1)		
	±0,3 unless otherw. specified				material: SEE NOTES		
	date			name		title:	
	drawn 07.02.2014 Heinrich			appd. 07.02.2014 Huether		WATER RESISTANT D-SUB HOOD SHIELDED 50 POS.	
	norm			d-old		SHORT SCREW 4-40UNC STAINLESS STEEL	
1 x b	Ä 5093	12.03.14	Heinrich	dwg no:			DIN-A3
a	Origin			15K1A1446			sh: 1
rev.	description	date	name	part no:			15-004850

